Manual of Flashing Light JD-08


I. Safety Installation Information


- 1. For security, please read the user manual carefully before initial operation.
- 2. Please be sure the power is off before connecting, the product is produced without fuse.
- 3. This system must not endanger life or property during the running failure or its security risks have been eliminated.

II. Technical Data

1. Power Supply: 12-265V AC/DC 2. Power: 4W 3. Flicker Frequency: 1HZ 4. Working temperature: -20°C∼+60°C

III. Product Overeview



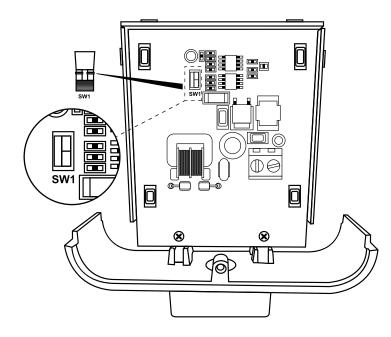


IV. User Instruction


- 1. Connecting two power supply cables with the terminal.
- 2. Jump Switch "SW1" is for switching the light's LED on flickering or lighting.
- 3. While "SW1" is putting in the 2 pins, the light's LED will keep flickering.
- 4. While "SW1" isn't putting in the 2 pins, the light's LED will keep lighting.

V. Installation


- 1. Set up the power supply cables.
- 2. Opening the flashing light Fig 1.

3. Installing the expansion tube into the 2 holes, fix them with screw M4*32 Fig 2.4. Installing the expansion tube into the 2 holes, fix them with screw M4*32 Fig 3.




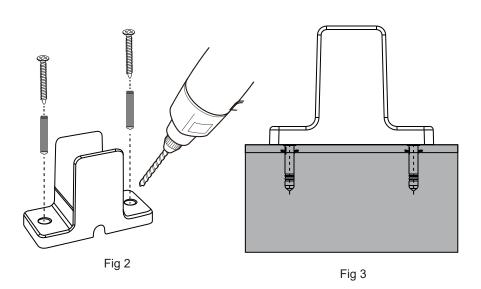


5. Unscrew the small screw from the yellow cover and black base, and take off the yellow cover as the direction showed Fig 4.

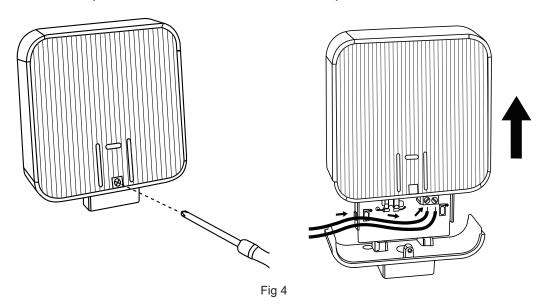

- 6. Connecting the power supply cables with terminal, and run them coming from the control panel through the black base's hole Fig 5.
- 7. Fix the black base and yellow cover with crew the Ø2.3*8, run the cables coming from the black base through the holder's hole Fig 6.

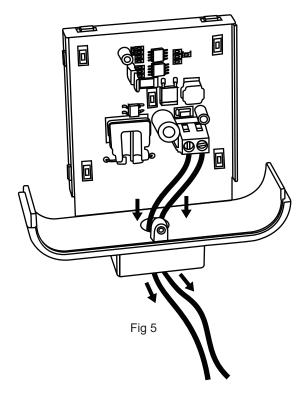

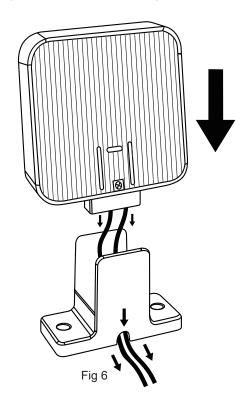

8. Fasten the yellow cover with the black holder, finish the installation Fig 7.

